
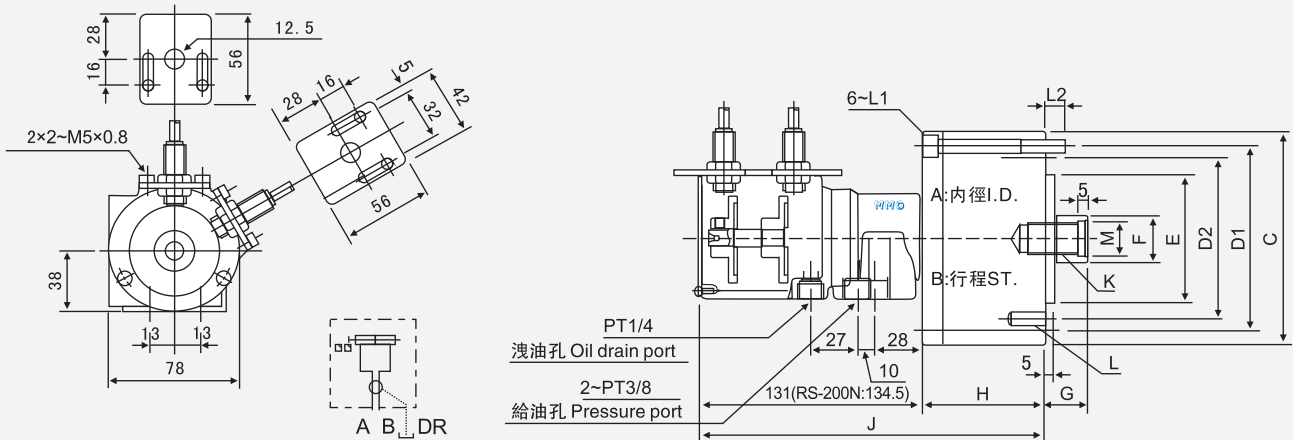


- 短型，高速，行程控制型回轉油壓缸。
- 感應式近接開關，行程調整容易，可確認油壓缸正確作動。
- 安裝時可由後端鎖固之。
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- For short form, light weight and high speed rotary cylinder.
- To ensure safe power chuck operations by conforming movement of the piston in the cylinder.
- Built-in safety check valves and pressure relief valves.
- The drain port should be independently connected to oil tank to avoid back pressure.

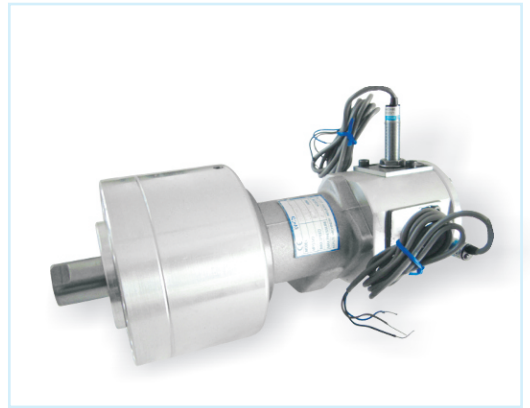

近接開關型式:

Proximity sensor: Model TLX-12N02E1-C(KFPS)DC 12~24V 200mA NPN

規格 Spec	活塞面積 Eff.piston area cm ²		行程 mm	最高使用回轉數r.p.m.	最高使用壓力MPa	GD ² kg·m ²	重量 kg
	押側 Extend	拉側 Retract					
型號 Model			Piston stroke	Max.speed	Max.pressure(kgf/cm ²)	Moment of inertia	Weight
RS-6520N	32.0	28.3	20	6000	4.0 (40)	0.01	3.2
RS-75N	43.0	37.1	15	6000	4.0 (40)	0.01	3.3
RS-7530N	43.0	37.1	30	6000	4.0 (40)	0.013	3.7
RS-100N	77.4	71.5	20	6000	4.0 (40)	0.04	4.8
RS-125N	121.6	113.1	25	5500	4.0 (40)	0.05	7.3
RS-150N	175.6	160.8	30	5500	4.0 (40)	0.16	10.6
RS-200N	313.0	290.4	35	5500	4.0 (40)	0.29	15.9

寸法 Size	A	B	C	D1	D2	E h7	F	G		H	J	K	L	L1	L2	M H8
								max.	min.							
型號 Model																
RS-6520N	65	20	97	80	80	60	25	45	25	62	193	M16×30	6~M8×16	M6×70	14.5	17
RS-75N	75	15	107	90	90	65	30	45	30	57	188	M20×35	6~M8×16	M8×60	12	21
RS-7530N	75	30	107	90	90	65	30	45	15	72	203	M20×35	6~M8×16	M8×75	12	21
RS-100N	100	20	132	115	100	80	30	45	25	72	203	M20×35	6~M10×20	M8×75	12	21
RS-125N	125	25	160	140	130	110	35	50	25	82	213	M24×45	6~M12×20	M8×85	12	25
RS-150N	150	30	190	170	130	110	45	55	25	95	226	M30×45	12~M12×24	M10×100	16	31
RS-200N	200	35	245	220	145	120	55	75	35	115	249.5	M36×60	12~M16×30	M10×125	21	37