

HS-A

高速开心式卡盘带安装盘


3-Jaw High-Speed Open-Center Chuck with Adaptor



■ Standard high-speed 3-jaw wedge-style open-center power chuck with adaptor

■ 两爪、四爪模式中空动力卡盘(液压)

HYDRAULIC CHUCK

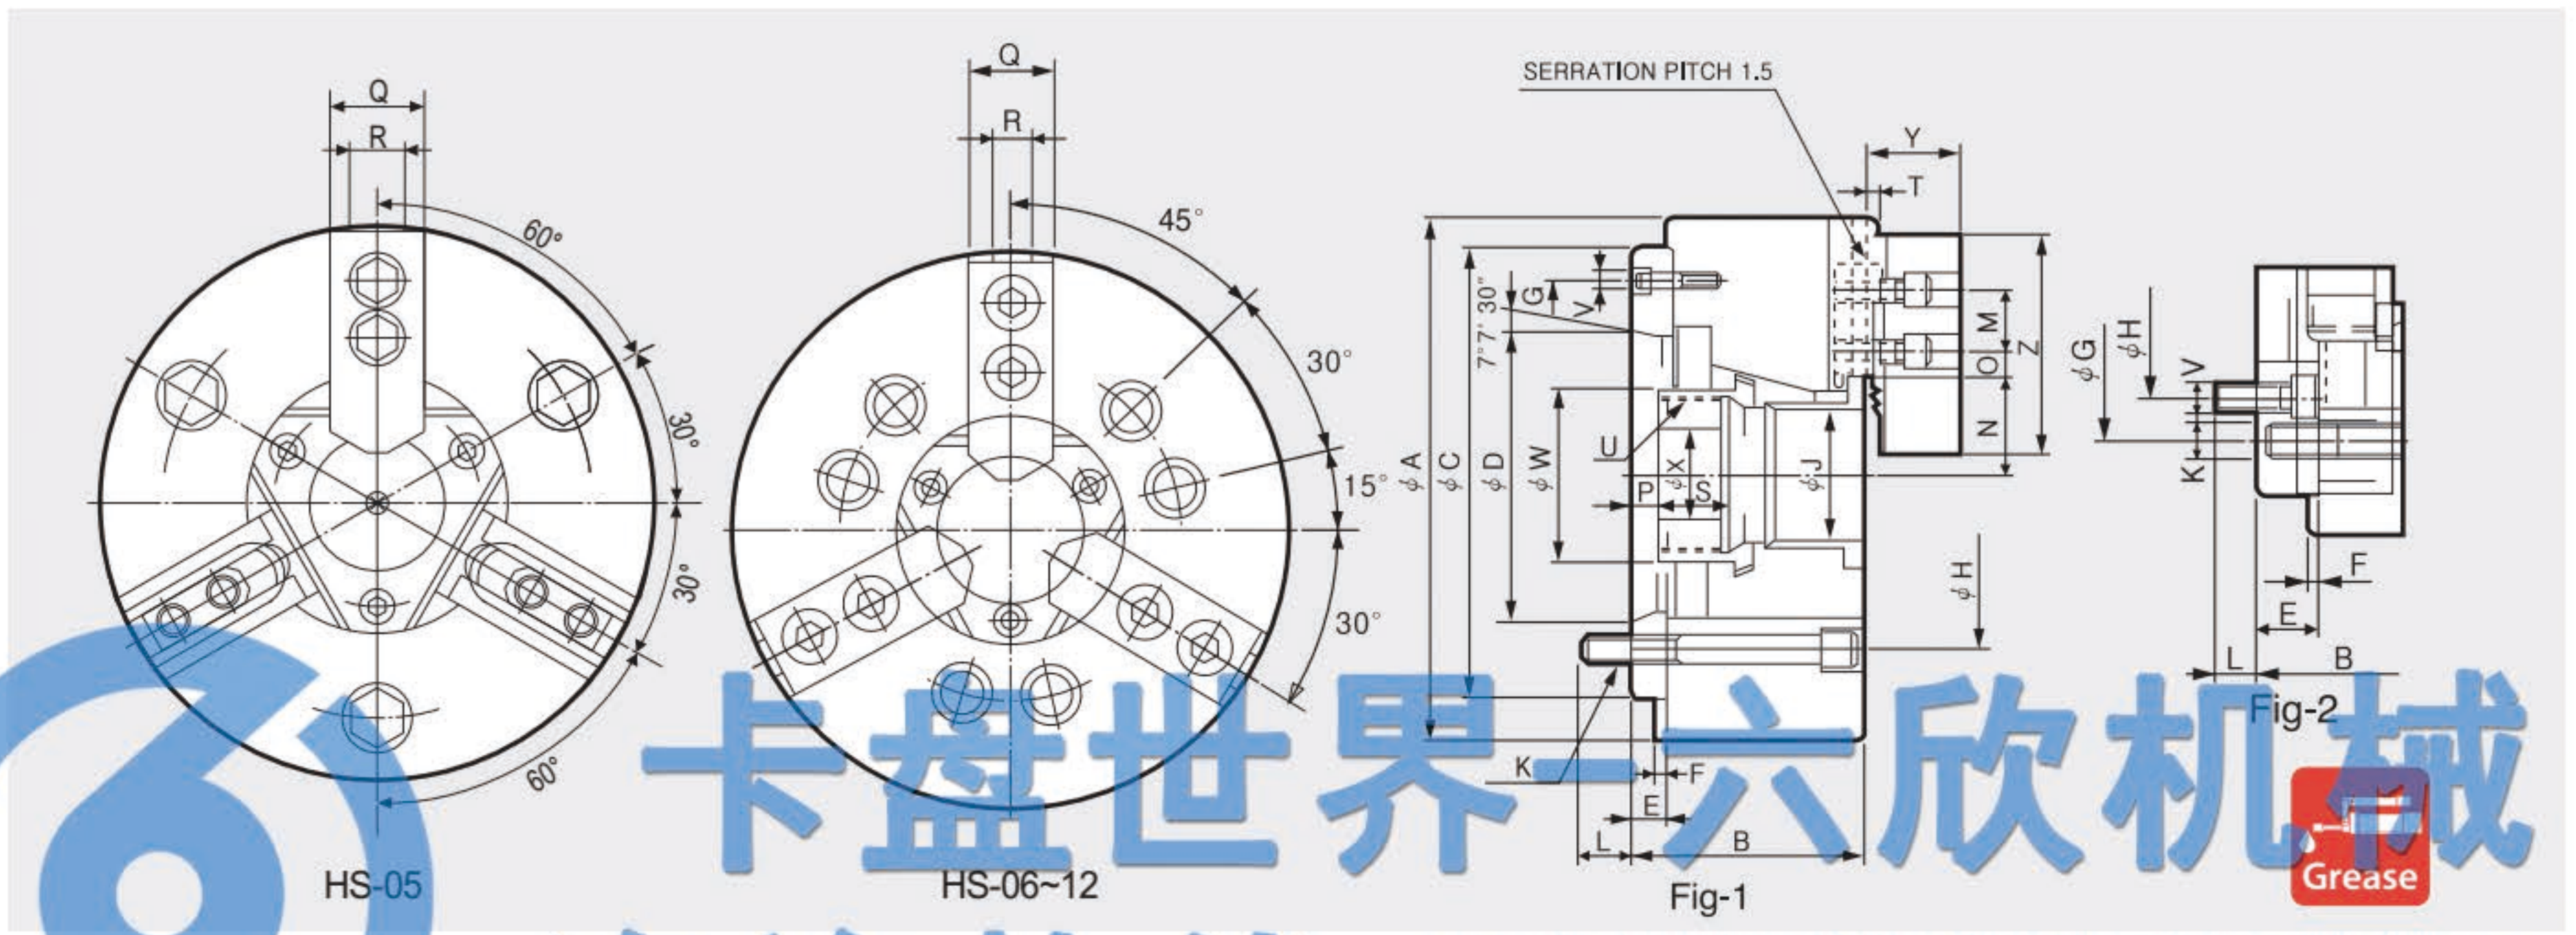

卡盘世界六欣机械
 咨询热线400-688-0096

It is recommended to grease chucks at least twice a day in order to maximize longevity.
 为了延长寿命 建议一天润滑2次。

	ΦA	B	ΦC(H6)	ΦD	E	F	ΦG	ΦH	ΦJ	K	L	M	Nmax.	Nmin.	Omax.	Omin.	Pmax.	Pmin.	Q	R	S	T	Umax.	V	ΦW	ΦX	Y	Z
HS-05A05	135	72	110	82.56	16	4	104.8	104.8	33	3-M10x60L	13	14	26.5	23.8	19.75	7.75	17	7	23	10	20	2	M40x1.5P	3xM6	47	-	26	54
HS-06A05	169	91	140	82.563	15	5	116	104.8	46	6-M10	16	20	32	2925	22.75	925	26	14	31	12	19	2	M55x2	3xM6	60	20	29	72
HS-08A06	210	103	170	106.375	17	5	150	133.4	52	6-M12	18	25	38.7	35	29.75	14.75	31.5	15.5	35	14	20.5	2	M60x2	6xM6	66	30	39	95
HS-10A06	254	120	220	106.375	25	5	171.4	133.4	77	6-M16	18.5	30	51	46.6	33.75	14.25	33.5	14.5	40	16	25	2	M75x2	6xM12	94	45	43	110
HS-10A08	254	113	220	139.719	18	5	190	171.4	77	6-M16	24	30	51	46.6	33.75	14.25	26.5	7.5	40	16	25	2	M85x2	6xM8	94	45	43	110
HS-12A06	304	129	220	106.375	25	6	171.4	133.4	91	6-M16	18.5	30	61.3	56	45.75	15.75	33	10	49	21	28	2	M90x2	6xM12	108	50	50.5	111
HS-12A08	304	122	220	139.719	18	6	190	171.4	91	6-M16	25	30	61.3	56	45.75	15.75	26	3	49	21	28	2	M100x2	6xMB	108	50	50.5	111

※ Blank and machined draw-nuts are available.
 ※ "U" is Max, Draw nut size.
 ※ Refer to Fig-2 for HS-10A06, HS-12A06.

※ 提供毛坯和机加拉力螺母。
 ※ "U" 是拉杆螺母(Draw Nut)最大值。
 ※ 对于 HS-10A06, HS-12A06 请参阅图2。

Specifications

Type	Spindle Nose 心轴鼻 编号	Thru Hole Dia. 通孔直径 [mm]	Grip Dia. [mm] 通孔直径 Max. Min.	Jaw Stroke Dia. 卡爪行程直径 [mm]	Plunger Stroke 柱塞行程 [mm]	Max. Permissible Input Force 允许输入力 [kN(kgf)]	Max. Static Gripping Force 最大静态夹持力 [kN(kgf)]	Max. R.P.M. 最大转速 [min ⁻¹ (r.p.m.)]	Weight 重量 [kg]	GD ² 容许工作惯性 [N·m ² (kgf·m ²)]	Operating Cylinder 工作缸	Max. Hydraulic Pressure 最大液压力 [Mpa(kgf/cm ²)]	Operating Hard Jaw 工作硬爪	KITAGAWA® Model 北川型号
HS-05A05	A2-5	33	135 12	5.4	10	17.5(1784)	36(3671)	7000	7.5	-	SYH-1036	3.43(35.0)	HB04N1	B-205
HS-06A05	A2-5	46	169 15	5.5	12	22(2243)	57(5812)	6000	13.7	2.45(0.250)	SH-13046 (SYH-1246)	2.8(28.6)	HB06A1	B-206A5
HS-08A06	A2-6	52	210 13	7.4	16	34.8(3549)	86(8769)	5000	23.6	6.9(0.71)	SH-15052 (SYH-1552)	2.65(27)	HB08A1	B-208A6
HS-10A06	A2-6	77	254 31	8.8	19	43(4385)	111(11319)	4200	41.5	12.75(1.3)	SH-18077 (SYH-1877)	2.7(27.5)	HB10A1	B-210A6
HS-10A08	A2-8	77	254 34	8.8	19	43(4385)	111(11319)	4200	40	12.65(1.29)	SYH-18077 (SYH-1877)	2.7(27.5)	HB10A1	B-210A8
HS-12A06	A2-6	91	304 42	10.6	23	55(5608)	144(14684)	3300	67	30.6(3.12)	SYH-2091	2.7(27.5)	HB12N1	B-212A6
HS-12A08	A2-8	91	304 50	10.6	23	55(5608)	144(14684)	3300	64	30.0(3.06)	SYH-2091	2.7(27.5)	HB12N1	B-212A8

※ Maximum turning speed is based upon actual measurement.
 ※ Specifications are subject to change without notice.
 ※ HS-10A06 and HS-10A08 are available with 75mm and 77mm thru holes.
 ※ Samchully Machinery Co., Ltd. is no longer an OEM manufacturer for Kitagawa® Iron Works Co., Ltd.

※ 最大转速基于实际测量。
 ※ 技术规格若发生改变, 恕不另行通知。
 ※ HS-10A06 与 HS-10A08 是可以通用75mm跟77mm 贯通通孔。
 ※ 三千里机械已结束与日本北川OEM生产