

两爪开心式卡盘 / 四爪开心式卡盘


HCHT / HCHF

2-Jaw, 4-Jaw Open-Center Chuck



HYDRAULIC CHUCK

- 2-jaw wedge-style open-center power chuck
- 4-jaw wedge-style open-center power chuck
- 两爪楔形开心式卡盘
- 四爪楔形开心式卡盘

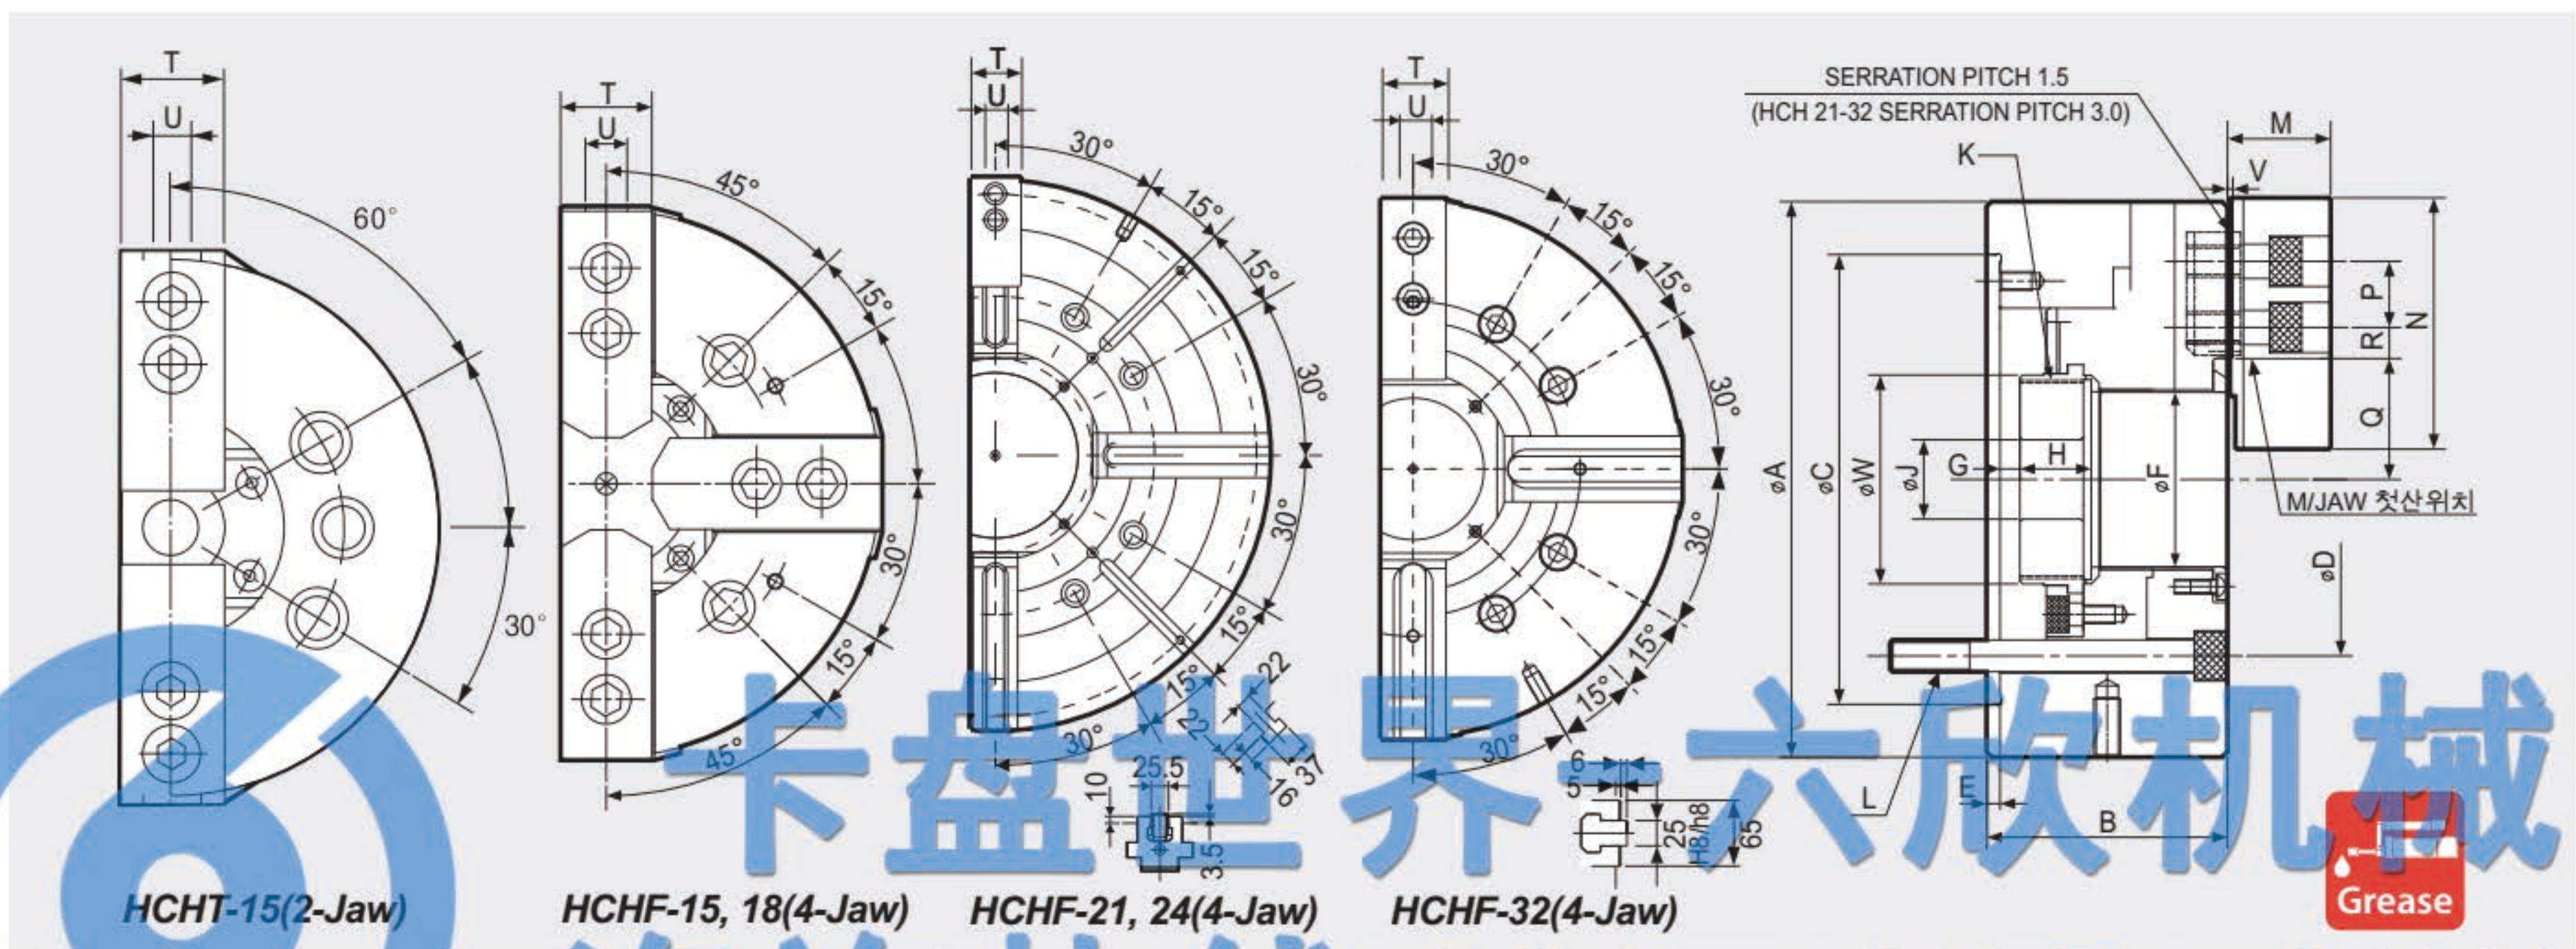

卡盘世界六欣机械
 咨询热线 400-688-0096

It is recommended to grease chucks at least twice a day in order to maximize longevity.
 为了延长寿命 建议一天润滑2次。

	ΦA	B	ΦC(H6)	ΦD	E	ΦF	Gmax.	Gmin.	H	I	ΦJ	Kmax.	L	M	N	P	Qmax.	Qmin.	Rmax.	Rmin.	T	U	V	ΦW
HCHT-15	381	133	300	235	6	117.5	11	-12	39	30	60	M130x2.0	6-M20	70	165	43	82	76.7	43.75	18.25	62	22	5	139
HCHF-15	381	133	300	235	6	118	11	-12	39	-	60	M130x2.0	4-M20x150	70	165	43	82	76.7	43.75	18.25	62	22	5	139
HCHF-18	450	133	380	235	6	118	11	-12	39	-	60	M130x2.0	4-M20x130	70	165	43	82	76.7	78.25	18.25	62	22	5	136
HCHF-21	530	140	380	330.2	6	140	11	-12	39	-	80	M155x3.0	8-M22x140	72	180	60	98.5	93.2	87.5	21.5	65	25	5	170
HCHF-24	610	149	380	330.2	6	165	20	-3	40	-	80	M175x3.0	8-M22x150	72	180	60	102.7	108	117.5	21.5	65	25	5	187
HCHF-32	800	150	520	463.6	6	240	34	0	34.5	-	80	M250x3.0	8-M24x130	83	160	38	162.6	153.6	182	20	75	25.5	3.5	260

※ Blank and machined draw-nuts are available.
 ※ "K" is Max. Draw nut size.

※ 提供毛坯和机加拉力螺母。
 ※ "K" 是拉杆螺母(Draw Nut)最大值。

Specifications

Type	Thru Hole Dia. 通孔直径 [mm]	Grip Dia. [mm] 通孔直径 Max. Min.	Jaw Stroke Dia. 卡爪冲程直径 [mm]	Plunger Stroke 柱塞冲程 [mm]	Max. Permissible Input Force 允许输入力 [kN(kgf)]	Max. Static Gripping Force 最大静态夹持力 [kN(kgf)]	Max. R.P.M. 最大转速 [min ⁻¹ (r.p.m.)]	Weight 重量 [kgf]	GD ² 容许工作惯性 [N·m ² (kgf·m ²)]	Operating Cylinder 工作缸	Max. Hydraulic Pressure 最大液压压力 [Mpa(kgf/cm ²)]	Operating Hard Jaw 工作硬爪	KITAGAWA® Model 北川型号
HCHT-15	117.5	381 30	10.6	23	47(4793)	120(12236)	2500	115	87.28(8.90)	SH-25011	1.5(15.3)	-	BT-15
HCHF-15	117.5	381 30	10.6	23	47(4793)	120(12236)	2500	115	87.3(8.90)	SH-25011	1.5(15.3)	HB15A1	-
HCHF-18	117.5	450 30	10.6	23	47(4793)	120(12236)	2000	159	165.8(16.9)	SH-25011	1.5(15.3)	HB15A1	-
HCHF-21	140	530 87	10.6	23	60(6117)	156(15907)	1700	235	351.2(35.8)	SH-25011	1.97(20.1)	HB18B2	-
HCHF-24	165	610 110	1.06	23	60(6117)	156(15907)	1400	293	651.4(66.4)	SH-25011	1.97(20.1)	HB18B2	-
HCHF-32	240	800 160	18	34	60(6795)	156(15821)	11200	530	601(61)	SYHL-2816	2.2(22.4)	HB32B2	-

※ Maximum turning speed is based upon actual measurement.
 ※ Specifications are subject to change without notice.
 ※ Samcully Machinery Co., Ltd. is no longer an OEM manufacturer for Kitagawa® Iron Works Co., Ltd.

※ 最大转速基于实际测量。
 ※ 技术规格若发生改变，恕不另行通知。
 ※ 三千里机械已结束与日本北川OEM生产。