


# MR 3-JAW AIR CHUCKS

## 三爪氣壓夾頭

專利產品  
Patent Protected




### 尺寸圖 » Dimensions

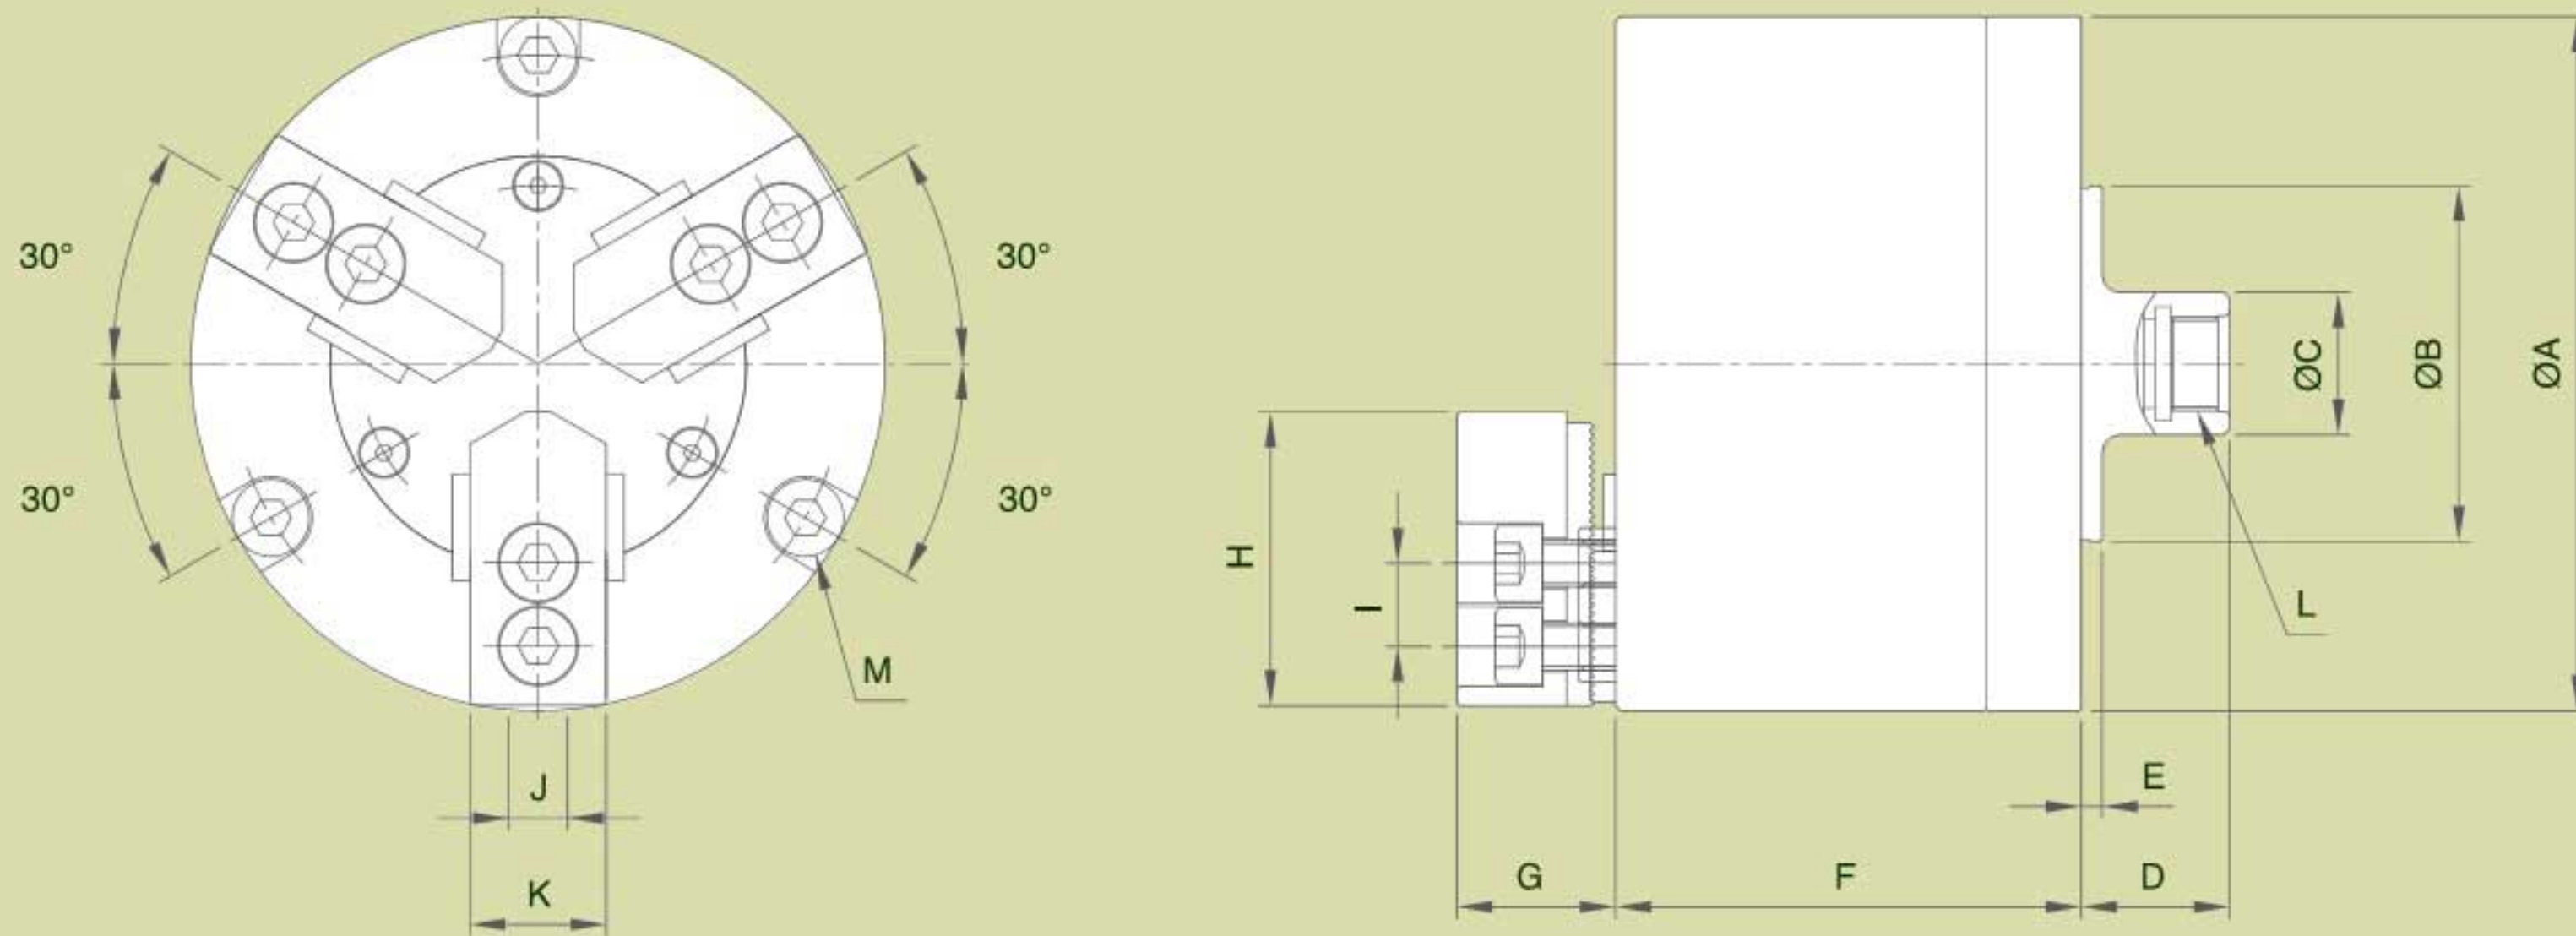

### 分度盤使用範例 » Operation Example for rotary table

### CNC車床使用範例 » Operation Example for CNC Lathe

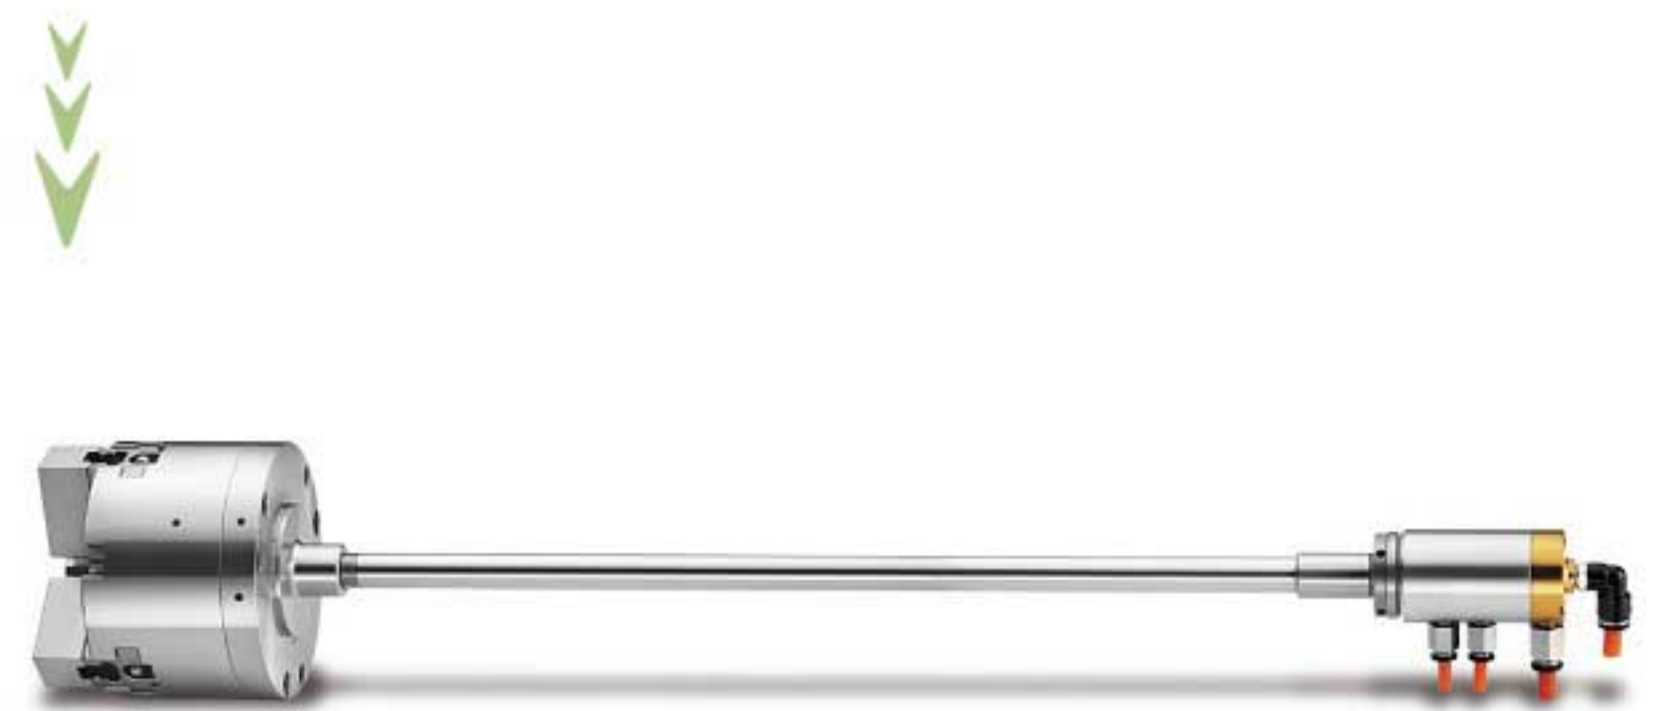

### 規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	A	B	C	D	E	F	G	H	I	J	L	K	M
MR-04	117	60	24	25	3.5	78.5	26.7	49.5	14	10	5/8"-32UNF	23	3-M8x1.25P(PCDø104)
MR-05	138	60	24	25	3.5	102.5	33.6	62	14	10	5/8"-32UNF	25	6-M8x1.25P(PCDø122)
MR-06	173	80	24	25	3.5	134	40.6	73	20	12	5/8"-32UNF	31	6-M8x1.25P(PCDø155)
MR-08	214	110	30	29	5	153.5	42.5	95	25	14	5/8"-32UNF	35	6-M10x1.5P(PCDø193)

型式/規格 MODEL /SPEC.	活塞面積 Piston Area (cm <sup>2</sup> )	柱塞行程 Plunger Stroke (mm)	爪行程直徑 Jaw Stroke (Diameter) mm	空壓夾持力 At Air Pressure 7 kgf/cm <sup>2</sup> (0.7Mpa) kgf	Gripping Force 7 kgf/cm <sup>2</sup> (0.7Mpa) (KN)	最高迴轉速 Max.Speed r.p.m (min <sup>-1</sup> )	夾持範圍 Gripping Range
MR-04	57	9	3.8	1100	(10.8)	3800	ø10~ø117
MR-05	74	10	5.4	1300	(12.7)	3000	ø12~ø135
MR-06	97	12	5.5	2000	(19.6)	2300	ø15~ø169
MR-08	156	16	7.4	3300	(32.3)	2100	ø20~ø210